



since
1920
valves

with reliability



ALLIGATOR CVV_{EASY} –

A valve especially for commercial vehicles and mobile homes



In day-to-day operation, commercial vehicles and mobile homes are exposed to considerable pressures.

The safety component – the tire valve – has to withstand high inflation pressure, high average speeds and temperatures, and must seal reliably in different rims.

- **Pressure capacity**
- **excellent sealing**
- **easy to assemble**
- **mounting by hand possible**

The patented construction combines the pressure capacity of a metal valve with the easy mounting of a Snap-In rubber valve.

An optimized sealing contour and a highly flexible sealing lip provide optimum tightness in the rim.

CVV_{EASY} valves can be mounted by hand.

Using an appropriate lubricant the valves can be pushed in by hand, thanks to the specially developed rubber compound. Successfully tested on many rims!

Disassembly without damage to the rim


The patented thrust washer holds the valve firmly in the wheel, even at high operational pressures.

To disassemble, simply cut through the thrust washer with pliers or a screwdriver at the predetermined breaking point and remove. The valve can be removed outwards through the valve hole without using any special tools.

Damage to the rim from dismantling tools is virtually impossible.

An overview of the advantages:

- ✓ Simple to **mount by hand**
- ✓ Reliable sealing in the rim
- ✓ Easily **removed – without special tools**
- ✓ No rim damage during disassembly
- ✓ High pressure capacity
- ✓ Fits almost every rim

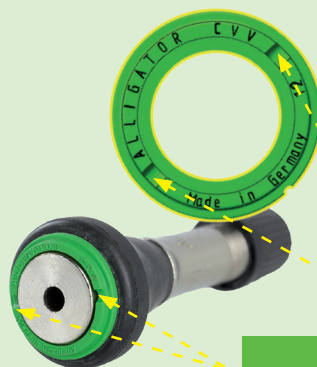

Patented thrust washer with predetermined breaking point



since 1920
valves with reliability



ALLIGATOR CVV_{EASY} –

A valve especially for commercial vehicles and mobile homes



- Top quality sealed valve cap
- Using a special valve cap, valve can also be pulled in by means of the valve cap – so enabling easy and reliable mounting with the ALLIGATOR OE mounting tool.
- Optimal sealing contour – mounting by hand possible
- Highly flexible sealing lip
- Patented thrust washer with predetermined breaking point for easy removal.

No special tools necessary!
No damage to rims!

Sophisticated optics for first-class vehicles

Pressure rated
up to 7 bar

Temperatur range
–40° to +130° C short term
100° C standard

Fits rim hole
11.3 + 0.4 mm

Burst pressure
15 bar (1.5 Mpa)



Make sure rims conform to standards!



Art. no	Description	Packing unit
530060	CVV _{EASY} -31mm + DS-P valve cap *	100 pcs
530050	CVV _{EASY} -31mm	100 pcs
530020	CVV _{EASY} -40mm	100 pcs
530030	CVV _{EASY} -47mm	100 pcs
530040	CVV _{EASY} -60mm	100 pcs